



Mongoose Replacement Screen

Specifications & Dimensions

Fits shaker machines: MI Swaco® Mongoose PT


Quantity per shaker: 4

Type of Screen: Frame/Pre-tensioned

Gasket: No

Weight: 29 pounds (13.15 Kgs)

Approx. Dimensions: 46" x 23" x 1-1/2"

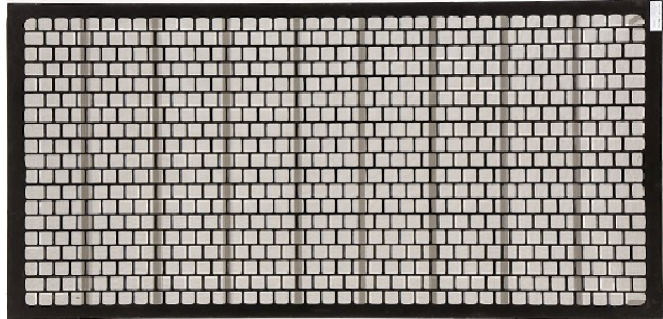

Mesh & API Information

CWC Mesh Type	CWC Mesh Size	API RP 13C Designation	D100 Cut Points (Microns)	API Micron Range for Screen Designation	Continental Wire Cloth Item #
CRX Oblong	60	API 50	321	275-327.50	FR-CRXMNG060
CRX Oblong	84	API 60	233	231-275	FR-CRXMNG084
CRX Oblong	110	API 70	207	196-231	FR-CRXMNG110
CRX Oblong	140	API 80	172	165-196	FR-CRXMNG140
CRX Oblong	175	API 100	139	137.50-165	FR-CRXMNG175
CRX Oblong	210	API 120	131	116.50-137.50	FR-CRXMNG210
CRX Oblong	250	API 140	101	98-116.50	FR-CRXMNG250
CRX Oblong	270	API 170	86	82.5-98	FR-CRXMNG270*
CRX Oblong	325	API 200	73	69-82.5	FR-CRXMNG325
CRX Oblong	400	API 230	67	58-69	FR-CRXMNG400
UF Square	24	API 20	861	780-925	FR-UFMNG024
UF Square	38	API 35	521	462.5-550	FR-UFMNG038
UF Square	50	API 45	373	327.5-390	FR-UFMNG050
UF Square	70	API 60	263	231-275	FR-UFMNG070
UF Square	84	API 70	212	196-231	FR-UFMNG084
UF Square	110	API 80	185	165-196	FR-UFMNG110
UF Square	140	API 100	150	137.5-165	FR-UFMNG140
UF Square	175	API 120	125	116.5-137.5	FR-UFMNG175
UF Square	210	API 140	106	98-116.5	FR-UFMNG210
UF Square	230	API 170	90	82.5-98	FR-UFMNG230
UF Square	250	API 200	76	69-82.5	FR-UFMNG250*
UF Square	325	API 230	66	58-69	FR-UFMNG325
UF Square	350	API 270	54	49-58	FR-UFMNG350
UF Square	400	API 325	47	41.5-49	FR-UFMNG400

The Continental Wire Cloth Difference

Continental Wire Cloth replacement shaker screens offer the oil industry a superior product—longevity, increased flow, durability and competitive prices.

make **The Black Screen™**
your last screen

Continental Wire Cloth does not manufacture screens for MI Swaco®. CWC manufactures replacement screens that give our customer an alternative option for their solids control needs. Standard mesh sizes are listed above for other available sizes please contact our sales department.

* Results from in house testing.