


## National Replacement Screen

### Specifications & Dimensions

**Fits shaker machines:** National 285P  
**Quantity per shaker:** 3  
**Type of Screen:** Frame/Pre-tensioned  
**Gasket:** Yes  
**Weight:** 33 pounds (14.96 Kgs)  
**Approx. Dimensions:** 46 1/2" x 28" x 1"

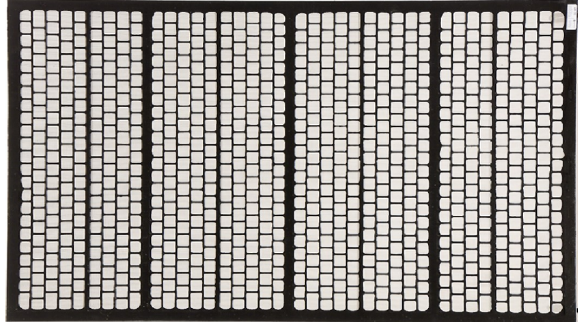

### Mesh & API Information

CWC Mesh Type	CWC Mesh Size	API RP 13C Designation	D100 Cut Points (Microns)	API Micron Range for Screen Designation	Continental Wire Cloth Item #
CRX Oblong	60	API 50	321	275-327.50	FR-CRX285NAT060
CRX Oblong	84	API 60	233	231-275	FR-CRX285NAT084
CRX Oblong	110	API 70	207	196-231	FR-CRX285NAT110
CRX Oblong	140	API 80	172	165-196	FR-CRX285NAT140
CRX Oblong	175	API 100	139	137.50-165	FR-CRX285NAT175
CRX Oblong	210	API 120	131	116.50-137.50	FR-CRX285NAT210
CRX Oblong	250	API 140	101	98-116.50	FR-CRX285NAT250
CRX Oblong	270	API 170	86	82.5-98	FR-CRX285NAT270*
CRX Oblong	325	API 200	73	69-82.5	FR-CRX285NAT325
CRX Oblong	400	API 230	67	58-69	FR-CRX285NAT400
UF Square	24	API 20	861	780-925	FR-UF285NAT024
UF Square	38	API 35	521	462.5-550	FR-UF285NAT038
UF Square	50	API 45	373	327.5-390	FR-UF285NAT050
UF Square	70	API 60	263	231-275	FR-UF285NAT070
UF Square	84	API 70	212	196-231	FR-UF285NAT084
UF Square	110	API 80	185	165-196	FR-UF285NAT110
UF Square	140	API 100	150	137.5-165	FR-UF285NAT140
UF Square	175	API 120	125	116.5-137.5	FR-UF285NAT175
UF Square	210	API 140	106	98-116.5	FR-UF285NAT210
UF Square	230	API 170	90	82.5-98	FR-UF285NAT230
UF Square	250	API 200	76	69.82.5	FR-UF285NAT250*
UF Square	325	API 230	66	58-69	FR-UF285NAT325
UF Square	350	API 270	54	49-58	FR-UF285NAT350
UF Square	400	API 325	47	41.5-49	FR-UF285NAT400

### The Continental Wire Cloth Difference

Continental Wire Cloth replacement shaker screens offer the oil industry a superior product—longevity, increased flow, durability and competitive prices.

make **The Black Screen™**  
your last screen

Continental Wire Cloth does not manufacture screens for National Oilwell®. CWC manufactures replacement screens that give our customer an alternative option for their solids control needs. Standard mesh sizes are listed above for other available sizes please contact our sales department.

\* Results from in house testing.